


DECORATIEVE VERLICHTING

PLAFOND OPBOUW

BEAM 0575 - 0576 - 0579

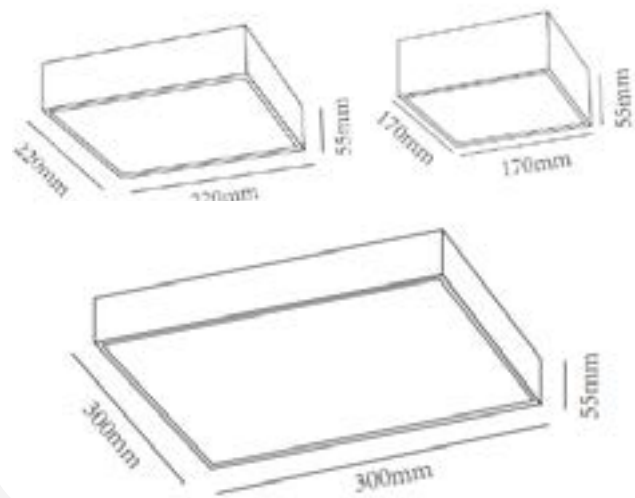

TECHNISCHE GEGEVENS

| | |
|---------------|-------------------------|
| Benaming | Beam 0575 - 0576 - 0579 |
| Kleur toestel | Wit |
| Klasse | LED |
| Richtbaar | Nee |
| Dimbaar | Nee |
| Voltage | 220-240V 50-60Hz |
| Lichtkleur | 3000K |
| CRI | >80 |
| Stralingshoek | 120° |
| IP | 20 |
| UGR | < 19 |
| Energielabel | A++ |

PRODUCTEIGENSCHAPPEN

- o Inclusief
- Module: Sanan LED Chips
- Driver: LIFUD Flicker-free

UITVOERING

| Benaming | Diameter | Vermogen | Lumen | Flux Code |
|-----------|------------------|----------|--------|-----------------|
| Beam 0575 | 170 x 170 x 55mm | 15W | 1500Lm | 47 79 96 99 98 |
| Beam 0576 | 220 x 220 x 55mm | 22W | 2200Lm | 47 78 95 99 100 |
| Beam 0579 | 300 x 300 x 55mm | 35W | 3000Lm | 46 78 95 99 100 |

