

GX53 BULB 470LM 5W 2700K NON-DIMM 110 BEAM FROSTED INTEGRAL

ILGX53N001



Integral LED GX53 lamps are an ideal retrofit lamp for GX53 fittings in kitchen units, display cabinets and under-shelf lighting. These highly efficient lamps offer significant energy savings and long life compared to halogen equivalents.

Details

| | |
|--------------------------|---------------------------------------|
| Quick Order Code: | 432812 |
| Barcode: | 5055788222934 |
| Category: | Lamps |
| Range Name: | GX53 |
| Product Type: | GX53 |
| Market Segment: | Commercial indoor, Residential indoor |
| Warranty (Years): | 2 |
| CE RoHS: | Yes |

Physical Data

| | |
|---------------------------------|--|
| Product Length (mm): | 75 |
| Product Width (mm): | 25 |
| Product Weight (g): | 65 |
| Material: | Aluminium, Polycarbonate |
| Base Term: | GX53 |
| Bulb Base: | GX53 |
| Construction: | SMD, Plastic Body |
| Globe Finish: | Frosted |
| Globe Type: | GX53 |
| Bulb Fixing: | Under Shelf Lighting, Display Cabinets |
| Bulb or Luminaire Shape: | Round |
| Placement / Application: | Indoor, Outdoor, General Lighting |

Electrical Data

| | |
|--------------------------------|------|
| Power (W): | 5 |
| Power Consumption (W) : | 5 |
| Power Factor: | 0.53 |
| Wattage equivalent (W): | 40 |
| Amperage (mA): | 42 |


| | |
|--------------------------|--------------|
| Dimming: | Non-Dimmable |
| Driver Included: | Yes |
| Electric Current: | AC |
| EN: | EN-62560 |
| LVD Certified: | Yes |

Light Data

| | |
|---|---------------|
| Luminous Flux in Lumens (lm): | 530 |
| Luminous efficacy (lm/W): | 106 |
| Correlated Colour Temperature (CCT) (K): | 2700 |
| Colour Temperature: | 2700K - Warm |
| Colour Temperature Name: | Warm |
| Beam Angle: | 110 |
| Colour Rendering Index (CRI): | 80 |
| Frequency Range (Hz): | 50/60 |
| Instant on (Less than 1 second): | Yes |
| LED Type: | Filament chip |
| Lifetime (hours): | 15000 |
| Switching Cycles: | 7500 |

Environment

| | |
|--|----------|
| EN: | EN-62560 |
| LVD Certified: | Yes |
| CE RoHS: | Yes |
| Previous Energy Rating: | A+ |
| New Energy Rating: | F |
| Hg 0% (Mercury Free): | Yes |
| IP Rating (Ingress Protection): | IP20 |
| Lowest Operating Temperature (°C): | -15 |
| Maximum Operating Temperature (°C): | 45 |

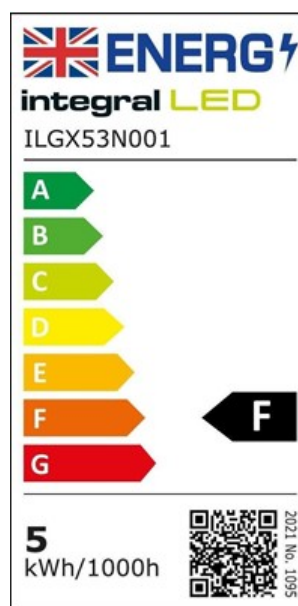

Packaging

| | | |
|-----------------------------|----|---|
| Package Weight (g): | 65 | Portal.integral-led.com |
| Package Length (mm): | 75 | |

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

| | |
|----------------------------|----|
| Package Width (mm): | 75 |
| Package Depth (mm): | 26 |